




Higher-Order Interactions in Networks

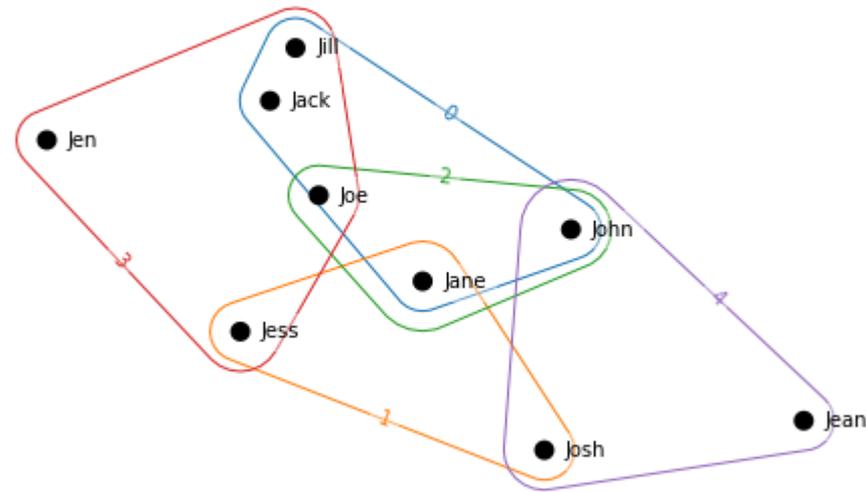

Hiroki Sayama
sayama@binghamton.edu

Higher-order interactions

- Interactions among more than two nodes (i.e., relationships that cannot be captured by simple pairwise edges)
- Typical modeling frameworks:
 - Hypergraphs
 - Simplicial complexes

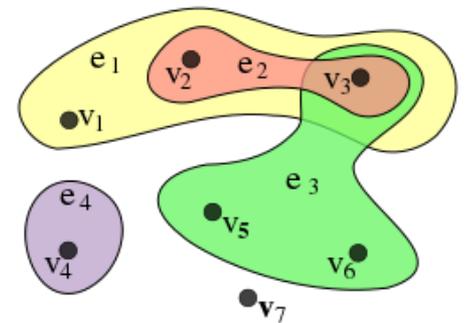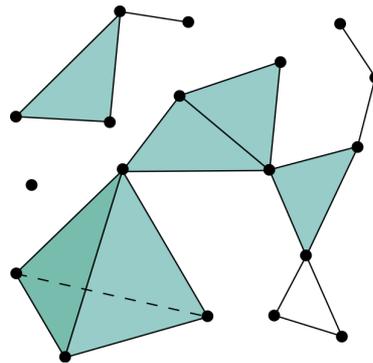

Images from Wikipedia

Heads up (2)

- This is even much newer than temporal or multilayer network research!!
- Tools for higher-order interaction modeling and analysis are very limited
- Can be even more math-intense than temporal or multilayer network research

Examples

- **Categorical relationships among objects (e.g., memberships in sets)**
- **Communications among multiple participants (e.g., group discussions)**
- **Multiple-species interactions in ecosystems**

Hypergraphs

Hypergraph

- A generalization of a graph in which a “**hyperedge**” can join any number of nodes
 - i.e., a hyperedge is a **set** of nodes
 - It is no longer dots and lines!



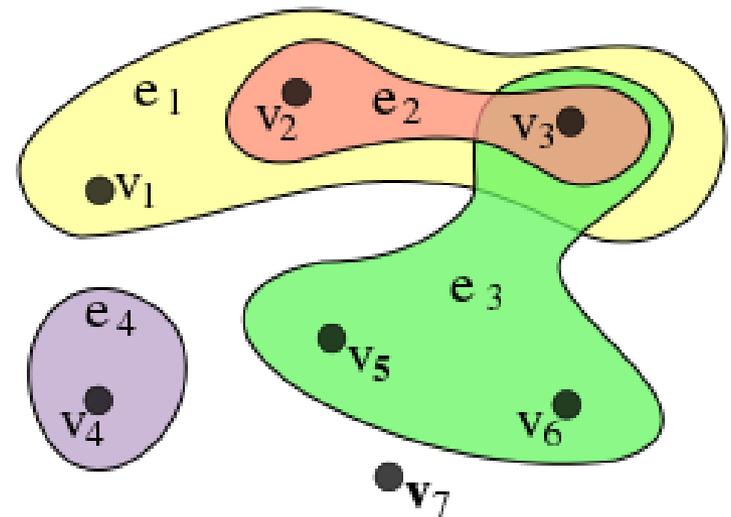


Image from Wikipedia

Matrix representation

- Hypergraph can be represented by a rectangular **incidence matrix**

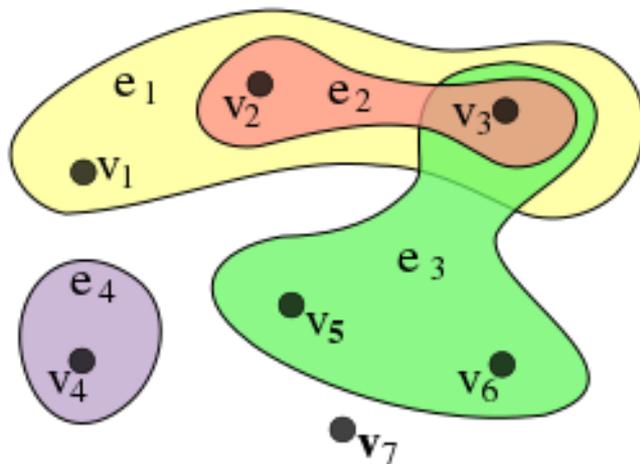


edges

	1	0	0	0
	1	1	0	0
	1	1	1	0
	0	0	0	1
	0	0	1	0
	0	0	1	0
	0	0	0	0

nodes


Duality of hypergraphs

- Every hypergraph has its “dual” obtained by swapping roles of nodes and edges (i.e., transposing its incidence matrix)

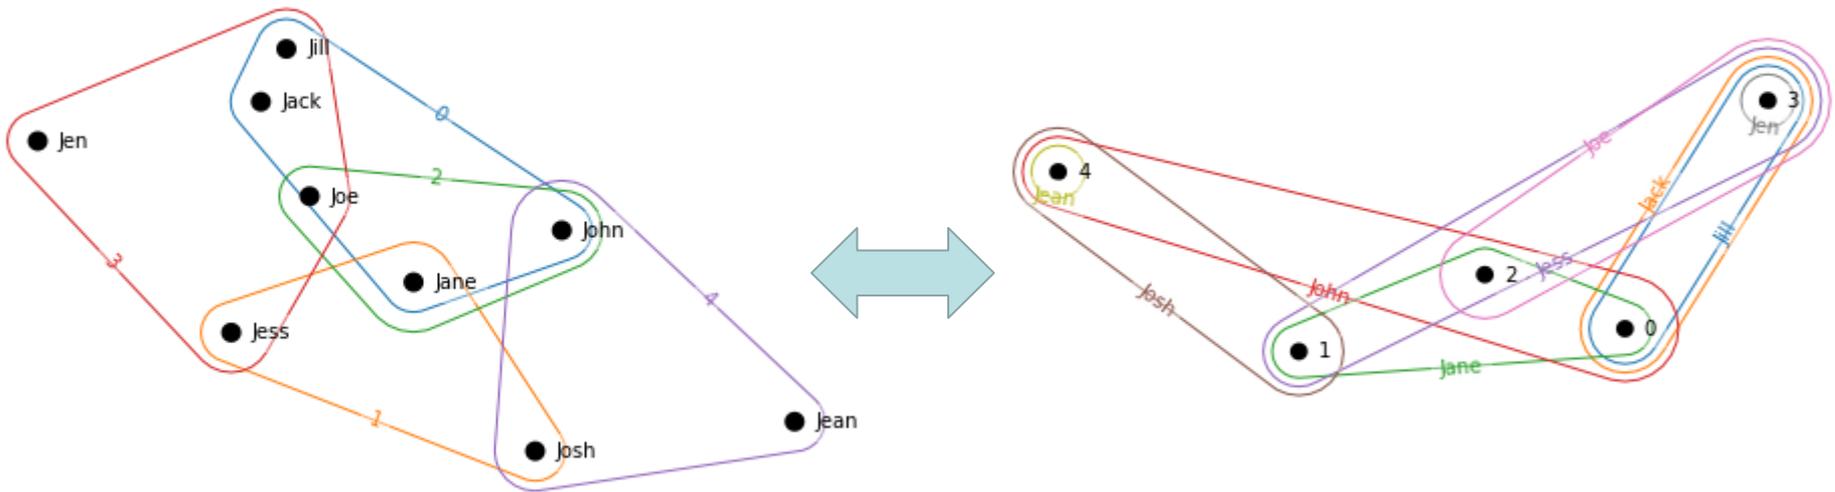

Representation as bipartite graphs

- Hypergraphs can be converted to ordinary graphs by creating new nodes to represent hyperedges

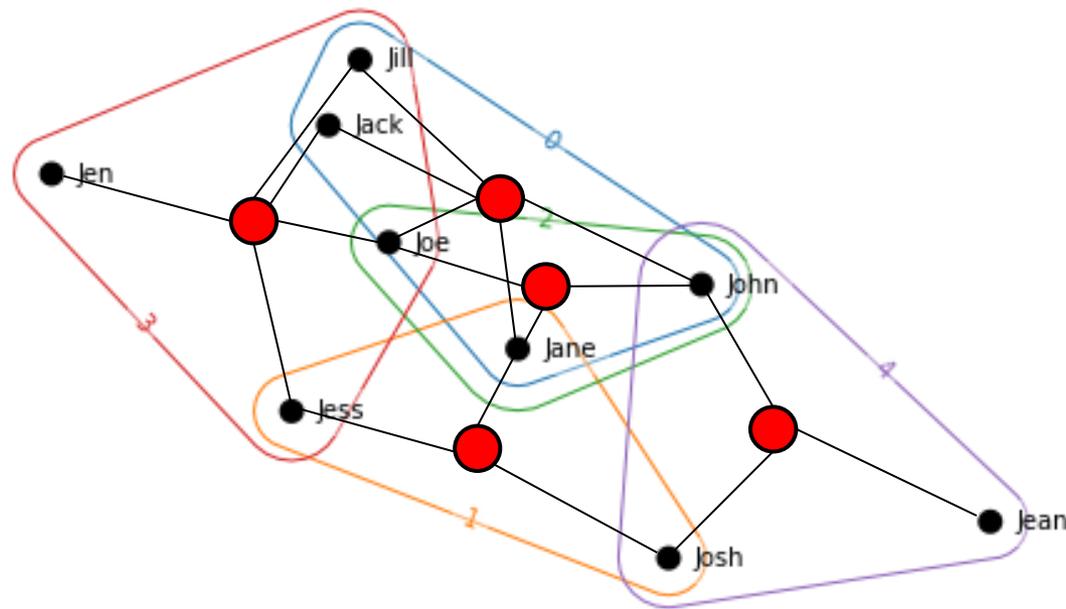


HyperNetX

- Developer team led by our Systems Science alumnus Cliff Joslyn! 😊



```
pip install hypernetx
import networkx as nx
import hypernetx as hnx
```

- You may need to install additional packages too

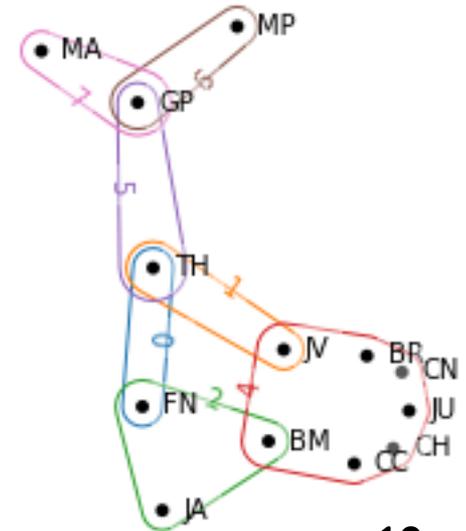

HyperNetX basics (1)

- Hyperedges as dictionaries

```
g = hnx.Hypergraph({
    0: ('John', 'Jane', 'Jill', 'Jack'),
    1: ('Jess', 'Josh', 'Jane'),
    2: ('John', 'Jane', 'Joe'),
    3: ('Joe', 'Jill', 'Jen', 'Jess', 'Jack'),
    4: ('Jean', 'Josh', 'John')
})

hnx.draw(g)
```

HyperNetX basics (2)

- `g.nodes`
- `g.edges`
- `g.shape`
- `g.incidence_dict`
- `g.incidence_matrix()`
- `g.degree(node)`
- `g.neighbors(node)`
- `g.size(edge)`
- `g.dual()`
- `g.connected_components()`
- `g.s_components(s)`
- `g.distance(i, j, s)`
- `g.edge_distance(k, l, s)`
- etc...

Connectedness in hypergraphs

- Connectivity can be measured at different levels of node sharing between hyperedges
 - Denoted by the "s" parameter in HyperNetX
 - E.g. "s = 2" means paths/distances are measured by assuming that only hyperedges that share 2 or more nodes are incidental to each other

Exercise

- Create and visualize a hypergraph model of your social surroundings by considering multiple groups (hyperedges) you belong to:
 - Research groups
 - Project teams
 - Family
 - Friend groups 1, 2, 3, ...
etc...

Exercise

- Analyze structural properties of the hypergraph model you just created
- Create and visualize its dual
- Who are connected from you with $s=2$, $s=3$, etc.?

Simplicial Complexes

Simplicial complex

- A more formal, structured way of representing multi-node interactions using combinations of “simplices” (plural of “simplex”)
 - Edge: 1-simplex
 - Triangle: 2-simplex
 - etc...


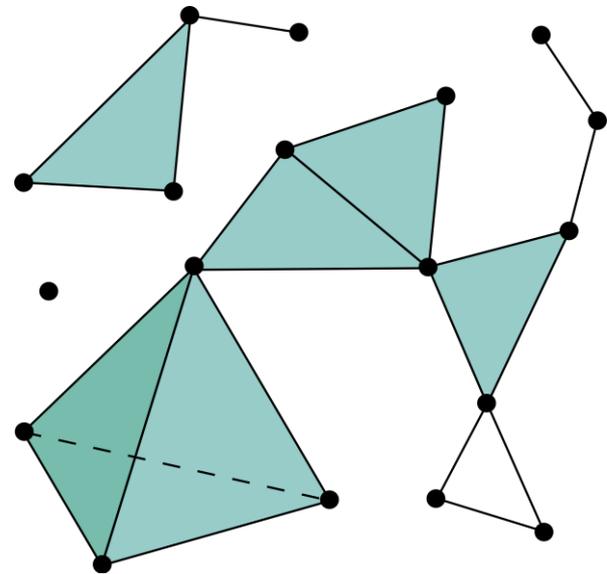


Image from Wikipedia

Properties of simplicial complexes

- Defined as a set of simplices
- All “subfaces” (i.e., lower-dimensional parts) of each simplex are also included in the simplicial complex
 - E.g. if a tetrahedron (3-simplex) is in a simplicial complex, then its four triangles and six edges must also be included in the set

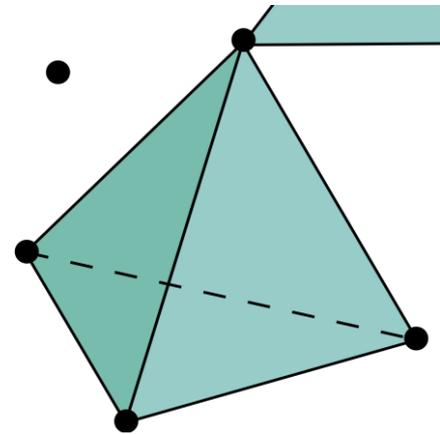

Hypergraph vs. simplicial complex?


- Hypergraphs are more open-ended and flexible than simplicial complexes
- Simplicial complexes assume any lower-dimensional interactions should also be present
 - A triad interaction means there must also be three dyad interactions too
 - Hypergraphs do not represent such assumptions

Simplicial complex in NetworkX

- You will need to do most of work yourself, but there are some tools available:

- “[py-draw-simplicial-complex](#)” by Iacopo Iacopini

<https://github.com/iaciac/py-draw-simplicial-complex>

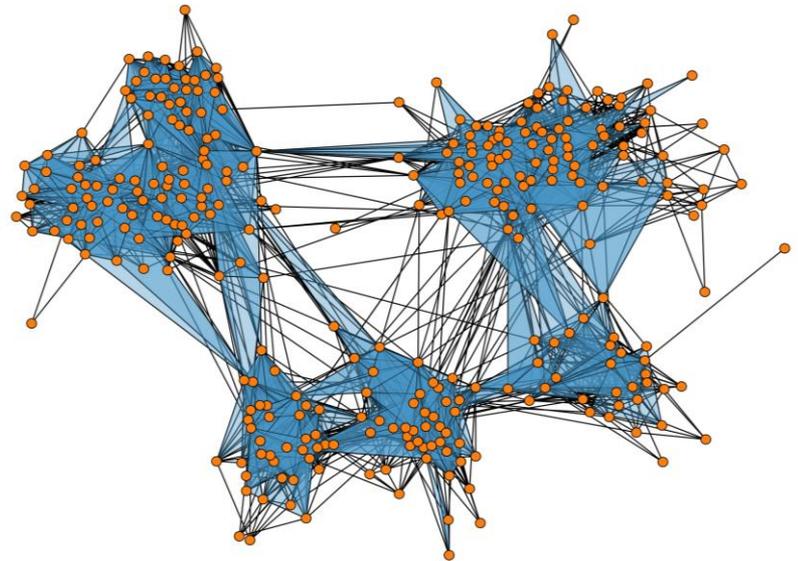


Exercise

- Rewrite the “social surroundings” hypergraph data you previously created into a simplicial complex (i.e., a set of simplices)
- Visualize it using `py-draw-simplicial-complex`



Application example (1): Dynamics on simplicial complexes

- Iacopini, I., et al. (2019) *Nature Communications*, 10(1), 1-9.
 - Contagion that takes into account the effects of triads shows an abrupt (explosive) jump of infection at a critical threshold

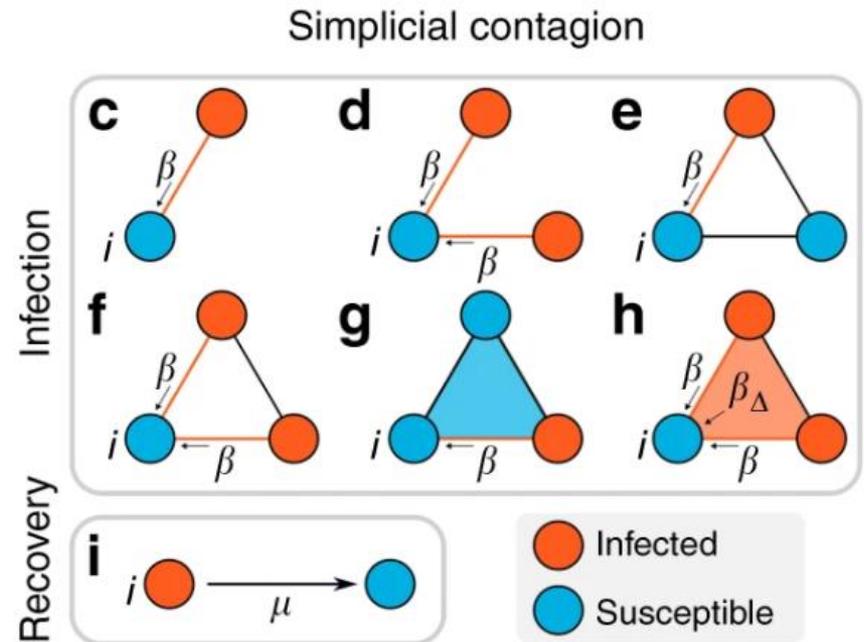

Application example (2): Dynamics on hypergraphs

- de Arruda, G. F., et al. (2020). *Physical Review Research*, 2(2), 023032.
 - Similar dynamical properties (e.g., bistability and explosive transition) are observed for hypergraphs

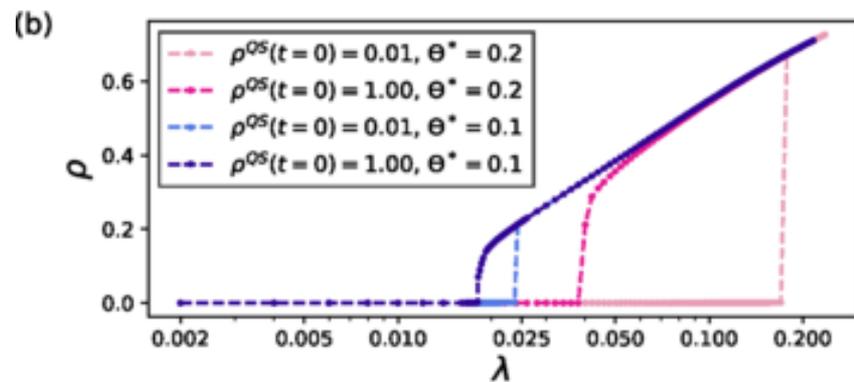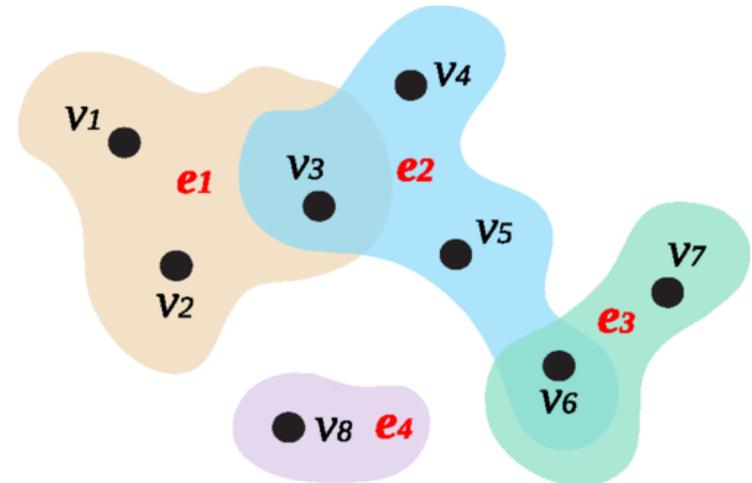

Warning

- Higher-order interactions in networks are still a **VERY** new topic in network science, so many concepts and methods are still being rapidly developed and tested
- **Some of those may not survive**
- This means you have a good chance to make big contributions to this area!